Cost Estimate Report

Project
Ifc2×3 Duplex Architecture

Client
Client name

Prepared by
Estimator name

Date
07/11/2026

Model revision
Rev 2 · Ifc2×3_Duplex_Architecture_Rev2.ifc


Region / currency
Saudi Arabia · SAR

1. SUMMARY

ESTIMATED TOTAL COST
909,812 SAR
including VAT 15%

EXPECTED RANGE
636,900 – 1,364,700
Class 4 - feasibility (-30% / +50%)

COST PER M² GFA
3,042
299 m² gross floor area

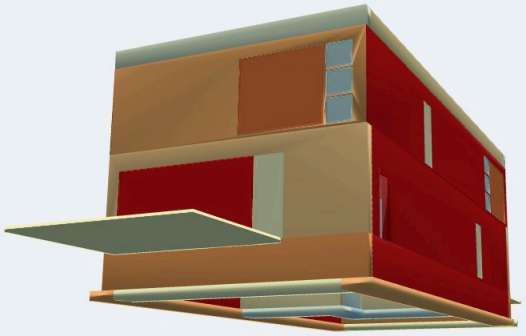

To narrow the range:

- 100% of the cost uses assumed indicative prices (prices change daily). Confirm the key prices in Prices & rates to reach Class 3.

2. COST BUILD-UP

Item	SAR	% of total
Measured work (quantified from the BIM model)	452,873	49.8%
Allowances for work not in the model	113,218	12.4%
Preliminaries (10%)	56,609	6.2%
Contingency (5%)	31,135	3.4%
Contractor's overhead (10%)	65,384	7.2%
Contractor's profit (10%)	71,922	7.9%
VAT (15%)	118,671	13.0%
Total	**909,812**	**100%**

3. ELEMENTAL SUMMARY (RICS NRM1)

Element	SAR	% of measured	SAR/m² GFA
1 Substructure	28,989	6.4%	97
2.1 Frame	58,895	13.0%	197
2.2 Upper floors	15,263	3.4%	51
2.3 Roof	26,445	5.8%	88
2.4 Stairs and ramps	20,482	4.5%	68
2.5 External walls	65,985	14.6%	221
2.6 Windows and external doors	60,626	13.4%	203
2.7 Internal walls and partitions	28,707	6.3%	96
2.8 Internal doors	19,086	4.2%	64
3.1 Wall finishes	25,075	5.5%	84
3.2 Floor finishes	35,704	7.9%	119
3.3 Ceiling finishes	14,622	3.2%	49
4 Fittings furnishings and equipment	52,994	11.7%	177
Measured work	**452,873**	**100%**	**1,514**

4. BY TRADE

Finishes	105,246
Openings	75,493
Masonry	59,881
Concrete	56,080
FF&E	52,994
Metals	46,565
Thermal & Moisture	21,330
Roofing	15,269
Wood	15,263
Earthworks	4,752

5. BY LEVEL

Level 1	198,151
Level 2	147,309
T/FDN	46,730
Roof	35,608
(no level)	25,075

6. SCOPE AND ALLOWANCES

Part of the building	In the model	SAR
Substructure	Yes	28,989
Frame and upper floors	Yes	74,157
Roof	Yes	26,445
External walls / envelope	Yes	126,610
Internal walls and doors	Yes	47,793
Internal finishes	Yes	75,401
MEP services	No	
External works	No	

Allowances included

MEP services allowance (not modelled)	25% of measured work	113,218

Commonly forgotten items

Excavation and backfill	Priced	1,382
Blinding under foundations	Priced	1,112
Anti-termite treatment	Priced	1,001
Hardcore / sub-base and DPM	Priced	2,822
Reinforcement	Priced	17,589
Formwork (incl. slab edges)	Priced	10,971
Lintels over openings	Priced	2,411
Wall plaster	Priced	8,780
Paint to walls	Priced	9,488
Paint to ceilings	Priced	2,855
Floor finishes	Priced	35,704
Skirting	Priced	6,825
Wall tiling in wet areas	Priced	6,792
Waterproofing (roofs and wet areas)	Priced	8,549
Window sills and sealant	Priced	5,902
Doors with frames and ironmongery	Priced	18,960
Handrails and balustrades	Priced	5,554
Protective paint to steelwork	Priced	871
Pipe and duct insulation	Not included	
Testing and commissioning of services	Not included	
Fire stopping of service penetrations	Not included	
Scaffolding, temporary works, site facilities	Normally in preliminaries	
Final cleaning and handover	Normally in preliminaries	

7. BASIS OF ESTIMATE AND ASSUMPTIONS

- Quantities are measured from the 3D model. Work that is not modelled is excluded unless it is listed as an allowance.
- Reinforcement is an allowance by ratio (kg per m^3 of concrete) until bar schedules are available.
- Openings up to 0.5 m^2 are not deducted from masonry and finishes (NRM2 practice).
- Overlaps between elements are deducted once (19 overlaps, 1.45 m^3): slabs measured through, columns to slab soffit, beams below slab, walls between frame members.
- Waste allowances are included in quantities as shown per item.
- Preliminaries 10%, contingency 5%, overhead 10%, profit 10%, escalation 0%.
- VAT at 15% is included in the total.
- Prices in SAR at the date of the rates used.
- Prices: 0% confirmed by you, 100% assumed indicative market prices (late 2026, not quotations), 0% estimated from US price levels.
- Loose furniture (18 items, about 21,852 SAR) is excluded: it is normally the client's separate FF&E budget. Built-in joinery is included.

8. EXCLUSIONS

- Land, legal and authority fees
- Design and supervision fees
- Loose furniture and equipment unless modelled
- Utility connections and off-site infrastructure
- Client contingency and finance costs

9. QUALITY CHECKS ON THE MODEL

Elements in the model / priced	231 / 230
Not priced (needs mapping)	0
Excluded (site context, decor)	1
Volumes agreeing within 5% with Revit's own values	104 of 106 (98%)
Overlaps found and deducted once	19 (1.46 m³)
Possible duplicate elements	2
Shapes not measured exactly	8
Reinforcement basis	ratio allowance

Quantities measured automatically from the IFC model (each element's 3D shape, in metres) and priced with the rate library shown in the detailed workbook. The accuracy range follows the AACE 18R-97 estimate classes as guidance. Full detail per element, with quantity formulas and rate sources, is in the Excel workbook.