Cost Estimate Report

Project
Ifc2×3 Duplex Architecture

Client
Client name

Prepared by
Estimator name

Date
11/7/2026

Model revision
Rev 2 · Ifc2×3_Duplex_Architecture_Rev2.ifc


Region / currency
Global (USD, no country) · USD

1. SUMMARY

ESTIMATED TOTAL COST
351,670 USD
including Tax 0%

EXPECTED RANGE
175,800 – 703,300
Class 5 - concept (-50% / +100%)

COST PER M² GFA
1,176
299 m² gross floor area

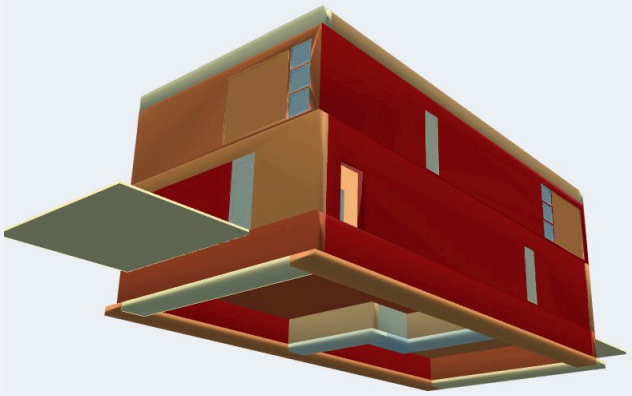

To narrow the range:

- 100% of the cost uses estimated prices, not yours. Open Prices & rates and enter local prices (start with the key ones).

2. COST BUILD-UP

Item	USD	% of total
Measured work (quantified from the BIM model)	251,634	71.6%
Preliminaries (10%)	25,163	7.2%
Contingency (5%)	13,840	3.9%
Contractor's overhead (10%)	29,064	8.3%
Contractor's profit (10%)	31,970	9.1%
Total	**351,670**	**100%**

3. ELEMENTAL SUMMARY (RICS NRM1)

Element	USD	% of measured	USD/m² GFA
1 Substructure	18,108	7.2%	61
2.1 Frame	36,344	14.4%	122
2.2 Upper floors	10,022	4.0%	34
2.3 Roof	15,749	6.3%	53
2.4 Stairs and ramps	6,903	2.7%	23
2.5 External walls	49,472	19.7%	165
2.6 Windows and external doors	25,324	10.1%	85
2.7 Internal walls and partitions	18,114	7.2%	61
2.8 Internal doors	6,430	2.6%	21
3.1 Wall finishes	16,494	6.6%	55
3.2 Floor finishes	14,734	5.9%	49
3.3 Ceiling finishes	9,714	3.9%	32
4 Fittings furnishings and equipment	24,225	9.6%	81
Measured work	**251,634**	**100%**	**841**

4. BY TRADE

Finishes	61,525
Masonry	45,682
Concrete	39,744
Openings	28,764
FF&E	24,225
Metals	17,646
Thermal & Moisture	10,760
Roofing	10,119
Wood	10,022
Earthworks	3,146

5. BY LEVEL

Level 1	95,517
Level 2	82,698
T/FDN	34,838
Roof	22,087
(no level)	16,494

6. SCOPE AND ALLOWANCES

Part of the building	In the model	USD
Substructure	Yes	18,108
Frame and upper floors	Yes	46,365
Roof	Yes	15,749
External walls / envelope	Yes	74,796
Internal walls and doors	Yes	24,545
Internal finishes	Yes	40,942
MEP services	No	
External works	No	

Commonly forgotten items

Excavation and backfill	Priced	1,056
Blinding under foundations	Priced	704
Anti-termite treatment	Priced	379
Hardcore / sub-base and DPM	Priced	1,929
Reinforcement	Priced	8,754
Formwork (incl. slab edges)	Priced	13,218
Lintels over openings	Priced	1,340
Wall plaster	Priced	9,649
Paint to walls	Priced	6,708
Paint to ceilings	Priced	2,450
Floor finishes	Priced	14,734
Skirting	Priced	2,920
Wall tiling in wet areas	Priced	5,548
Waterproofing (roofs and wet areas)	Priced	4,674
Window sills and sealant	Priced	2,509
Doors with frames and ironmongery	Priced	6,360
Handrails and balustrades	Priced	1,783
Protective paint to steelwork	Priced	712
Pipe and duct insulation	Not included	
Testing and commissioning of services	Not included	
Fire stopping of service penetrations	Not included	
Scaffolding, temporary works, site facilities	Normally in preliminaries	
Final cleaning and handover	Normally in preliminaries	

7. BASIS OF ESTIMATE AND ASSUMPTIONS

- Quantities are measured from the 3D model. Work that is not modelled is excluded unless it is listed as an allowance.
- Reinforcement is an allowance by ratio (kg per m^3 of concrete) until bar schedules are available.
- Openings up to 0.5 m^2 are not deducted from masonry and finishes (NRM2 practice).
- Overlaps between elements are deducted once (19 overlaps, 1.45 m^3): slabs measured through, columns to slab soffit, beams below slab, walls between frame members.
- Waste allowances are included in quantities as shown per item.
- Preliminaries 10%, contingency 5%, overhead 10%, profit 10%, escalation 0%.
- Tax at 0% is included in the total.
- Prices in USD at the date of the rates used.
- 100% of the measured cost uses estimated (not local) prices.

8. EXCLUSIONS

- Land, legal and authority fees
- Design and supervision fees
- Loose furniture and equipment unless modelled
- Utility connections and off-site infrastructure
- Client contingency and finance costs

9. QUALITY CHECKS ON THE MODEL

Elements in the model / priced	231 / 230
Not priced (needs mapping)	0
Excluded (site context, decor)	1
Volumes agreeing within 5% with Revit's own values	104 of 106 (98%)
Overlaps found and deducted once	19 (1.46 m^3)
Possible duplicate elements	2
Shapes not measured exactly	8
Reinforcement basis	ratio allowance

Quantities measured automatically from the IFC model (each element's 3D shape, in metres) and priced with the rate library shown in the detailed workbook. The accuracy range follows the AACE 18R-97 estimate classes as guidance. Full detail per element, with quantity formulas and rate sources, is in the Excel workbook.