Cost Estimate Report

Project
Ifc2×3 Duplex Architecture

Client
Client name

Prepared by
Estimator name

Date
11/7/2026

Model revision
Rev 2 · Ifc2×3_Duplex_Architecture_Rev2.ifc


Region / currency
Saudi Arabia · SAR

1. SUMMARY

ESTIMATED TOTAL COST
1,156,380 SAR
including VAT 15%

EXPECTED RANGE
578,200 – 2,312,800
Class 5 - concept (-50% / +100%)

COST PER M² GFA
3,866
299 m² gross floor area

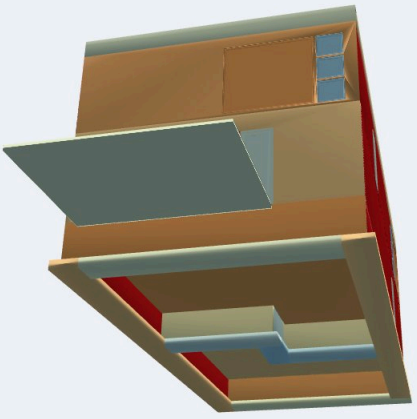

To narrow the range:

- 100% of the cost uses SAMPLE rates. Enter real rates.

2. COST BUILD-UP

Item	SAR	% of total
Measured work (quantified from the BIM model)	575,606	49.8%
Allowances for work not in the model	143,902	12.4%
Preliminaries (10%)	71,951	6.2%
Contingency (5%)	39,573	3.4%
Contractor's overhead (10%)	83,103	7.2%
Contractor's profit (10%)	91,413	7.9%
VAT (15%)	150,832	13.0%
Total	**1,156,380**	**100%**

3. ELEMENTAL SUMMARY (RICS NRM1)

Element	SAR	% of measured	SAR/m² GFA
1 Substructure	32,731	5.7%	109
2.1 Frame	68,379	11.9%	229
2.2 Upper floors	30,555	5.3%	102
2.3 Roof	41,480	7.2%	139
2.4 Stairs and ramps	19,486	3.4%	65
2.5 External walls	98,791	17.2%	330
2.6 Windows and external doors	65,158	11.3%	218
2.7 Internal walls and partitions	43,338	7.5%	145
2.8 Internal doors	16,447	2.9%	55
3.2 Floor finishes	50,548	8.8%	169
3.3 Ceiling finishes	29,334	5.1%	98
4 Fittings furnishings and equipment	79,359	13.8%	265
Measured work	**575,606**	**100%**	**1,924**

4. BY TRADE

Finishes	129,163
Openings	81,606
Masonry	80,125
FF&E	79,359
Concrete	78,718
Metals	40,850
Thermal & Moisture	33,294
Wood	30,555
Roofing	20,910
Earthworks	1,027

5. BY LEVEL

Level 1	245,495
Level 2	211,442
T/FDN	64,300
Roof	54,369

6. SCOPE AND ALLOWANCES

Part of the building	In the model	SAR
Substructure	Yes	32,731
Frame and upper floors	Yes	98,934
Roof	Yes	41,480
External walls / envelope	Yes	163,949
Internal walls and doors	Yes	59,786
Internal finishes	Yes	79,882
MEP services	No	
External works	No	

Allowances included

MEP services allowance (not modelled)	25% of measured work	143,902

7. BASIS OF ESTIMATE AND ASSUMPTIONS

- Quantities are measured from the 3D model. Work that is not modelled is excluded unless it is listed as an allowance.
- Reinforcement is an allowance by ratio (kg per m^3 of concrete) until bar schedules are available.
- Openings up to 0.5 m^2 are not deducted from masonry and finishes (NRM2 practice).
- Overlaps between elements are deducted once (19 overlaps, 1.45 m^3): slabs measured through, columns to slab soffit, beams below slab, walls between frame members.
- Waste allowances are included in quantities as shown per item.
- Preliminaries 10%, contingency 5%, overhead 10%, profit 10%, escalation 0%.
- VAT at 15% is included in the total.
- Prices in SAR at the date of the rates used.

- 100% of the measured cost uses SAMPLE placeholder rates.

8. EXCLUSIONS

- Land, legal and authority fees
- Design and supervision fees
- Loose furniture and equipment unless modelled
- Utility connections and off-site infrastructure
- Client contingency and finance costs

9. QUALITY CHECKS ON THE MODEL

Elements in the model / priced	210 / 210
Not priced (needs mapping)	0
Excluded (site context, decor)	0
Volumes agreeing within 5% with Revit's own values	104 of 106 (98%)
Overlaps found and deducted once	19 (1.46 m³)
Possible duplicate elements	2
Shapes not measured exactly	8
Reinforcement basis	ratio allowance

Quantities measured automatically from the IFC model (each element's 3D shape, in metres) and priced with the rate library shown in the detailed workbook. The accuracy range follows the AACE 18R-97 estimate classes as guidance. Full detail per element, with quantity formulas and rate sources, is in the Excel workbook.