Cost Estimate Report

Project
Ifc2×3 Duplex Architecture

Client
Client name

Prepared by
Estimator name

Date
07/11/2026

Model revision
Rev 2 · Ifc2×3_Duplex_Architecture_Rev2.ifc


Region / currency
United Kingdom · GBP

1. SUMMARY

ESTIMATED TOTAL COST
398,311 GBP
including VAT 20%

EXPECTED RANGE
278,800 – 597,500
Class 4 - feasibility (-30% / +50%)

COST PER M² GFA
1,332
299 m² gross floor area

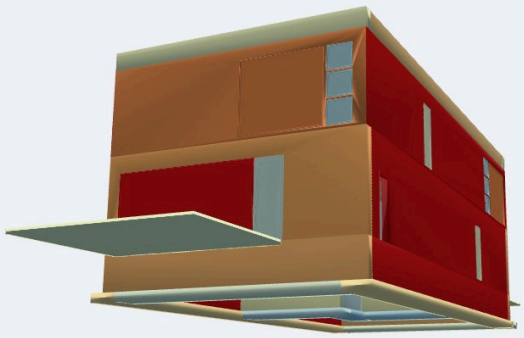

To narrow the range:

- 85% of the cost uses assumed indicative prices (prices change daily). Confirm the key prices in Prices & rates to reach Class 3.
- Not in the model and no allowance yet: MEP services.

2. COST BUILD-UP

Item	GBP	% of total
Measured work (quantified from the BIM model)	235,343	59.1%
Preliminaries (10%)	23,534	5.9%
Contingency (6%)	15,533	3.9%
Contractor's overhead (12%)	32,929	8.3%
Contractor's profit (8%)	24,587	6.2%
VAT (20%)	66,385	16.7%
Total	**398,311**	**100%**

3. ELEMENTAL SUMMARY (RICS NRM1)

Element	GBP	% of measured	GBP/m² GFA
1 Substructure	13,958	5.9%	47
2.1 Frame	29,656	12.6%	99
2.2 Upper floors	8,895	3.8%	30
2.3 Roof	14,950	6.4%	50
2.4 Stairs and ramps	6,018	2.6%	20
2.5 External walls	57,469	24.4%	192
2.6 Windows and external doors	37,359	15.9%	125
2.7 Internal walls and partitions	23,264	9.9%	78
2.8 Internal doors	6,878	2.9%	23
3.2 Floor finishes	13,449	5.7%	45
3.3 Ceiling finishes	8,559	3.6%	29
4 Fittings furnishings and equipment	14,888	6.3%	50
Measured work	**235,343**	**100%**	**787**

4. MAIN COST DRIVERS

The items and prices that move the total most. Confirm these first.

Work item	Quantity	Rate	GBP	% of measured
Window complete	65.9 m2	499.40	32,931	14.0%
Brick masonry wall	285.1 m2	96.84	27,610	11.7%
Concrete block masonry wall	366.3 m2	55.64	20,379	8.7%
Built-in joinery / cabinets (per metre run)	46.3 m	321.40	14,888	6.3%
Timber floor finish	210.7 m2	50.32	10,603	4.5%
Cement plaster to walls	409.4 m2	25.50	10,441	4.4%
Formwork to walls	153.8 m2	66.60	10,243	4.4%
Structural steel members	2,788.9 kg	3.48	9,716	4.1%
Emulsion paint to walls	750.7 m2	11.92	8,948	3.8%
Lightweight roof deck / structure	139.6 m2	63.90	8,919	3.8%

Resource	Quantity	Price used	% of measured	+10% price adds (incl. mark-ups)
Skilled tradesman (mason / carpenter / fitter / electrician) (assumed)	2,187.7 hour	32.00	29.7%	11,849
Window (supply) (assumed)	65.9 m2	450.00	12.6%	5,022
Labourer / helper (assumed)	1,072.8 hour	22.00	10.0%	3,995
Brick (assumed)	17,106.6 nr	0.75	5.5%	2,171
Built-in cabinet / joinery (supply per metre) (estimated)	46.3 m	257.40	5.1%	2,018
Ready-mixed concrete C25/30 delivered (assumed)	82.7 m3	140.00	4.9%	1,960

5. BY TRADE

Finishes	53,257
Masonry	49,167
Openings	41,206
Concrete	28,969
Metals	16,876
FF&E	14,888
Thermal & Moisture	10,111
Roofing	8,919
Wood	8,895
Earthworks	3,056

6. BY LEVEL

Level 1	99,064
Level 2	88,694
T/FDN	25,116
Roof	22,470

7. SCOPE AND ALLOWANCES

Part of the building	In the model	GBP
Substructure	Yes	13,958
Frame and upper floors	Yes	38,551
Roof	Yes	14,950
External walls / envelope	Yes	94,828
Internal walls and doors	Yes	30,142
Internal finishes	Yes	22,008
MEP services	No	
External works	No	

Commonly forgotten items

Excavation and backfill	Priced	782
Blinding under foundations	Priced	683
Anti-termite treatment	Priced	327
Hardcore / sub-base and DPM	Priced	2,136
Reinforcement	Not included	
Formwork (incl. slab edges)	Priced	11,928
Lintels over openings	Priced	1,177
Wall plaster	Priced	12,288
Paint to walls	Priced	10,414
Paint to ceilings	Not included	
Floor finishes	Priced	13,449
Skirting	Not included	
Wall tiling in wet areas	Not included	
Waterproofing (roofs and wet areas)	Priced	4,766
Window sills and sealant	Priced	2,212
Doors with frames and ironmongery	Priced	6,816
Handrails and balustrades	Priced	1,554
Protective paint to steelwork	Priced	637
Pipe and duct insulation	Not included	
Testing and commissioning of services	Not included	
Fire stopping of service penetrations	Not included	
Scaffolding, temporary works, site facilities	Normally in preliminaries	
Final cleaning and handover	Normally in preliminaries	

8. BASIS OF ESTIMATE AND ASSUMPTIONS

- Quantities are measured from the 3D model. Work that is not modelled is excluded unless it is listed as an allowance.
- Reinforcement is taken from the modelled bars.
- Openings up to 0.5 m² are not deducted from masonry and finishes (NRM2 practice).
- Overlaps between elements are deducted once (19 overlaps, 1.45 m³): slabs measured through, columns to slab soffit, beams below slab, walls between frame members.
- Waste allowances are included in quantities as shown per item.
- Preliminaries 10%, contingency 6%, overhead 12%, profit 8%, escalation 0%.
- VAT at 20% is included in the total.
- Prices in GBP at the date of the rates used.
- Prices: 0% confirmed by you, 85% assumed indicative market prices (late 2026, not quotations), 15% estimated from US price levels.
- Loose furniture (18 items, about 6,574 GBP) is excluded: it is normally the client's separate FF&E budget. Built-in joinery is included.

9. EXCLUSIONS

- Land, legal and authority fees
- Design and supervision fees
- Loose furniture and equipment unless modelled
- Utility connections and off-site infrastructure
- Client contingency and finance costs

10. QUALITY CHECKS ON THE MODEL

Elements in the model / priced	231 / 210
Not priced (needs mapping)	0
Excluded (site context, decor)	21
Volumes agreeing within 5% with Revit's own values	104 of 106 (98%)
Overlaps found and deducted once	19 (1.46 m³)
Possible duplicate elements	2
Shapes not measured exactly	8
Reinforcement basis	modelled bars

Quantities measured automatically from the IFC model (each element's 3D shape, in metres) and priced with the rate library shown in the detailed workbook. The accuracy range follows the AACE 18R-97 estimate classes as guidance. Full detail per element, with quantity formulas and rate sources, is in the Excel workbook.